NOT ONLY TV
DUAL DVBT PCI

Double your viewing pleasure with
NOT ONLY TV DUAL DVBT PCI!

With NOT ONLY TV DUAL DVBT PCI you can watch two DVBT channels live at the same time.Not only the live channels preview, you can also watch live TV in one window and record another channel in another window or even recording both windows. It turns your PC into a portable digital multimedia center. You may enjoy NOT ONLY TV DUAL DVBT PCI entertainment whenever you like!

NOT ONLY TV application provides you with a versatile set of functions with a user-friendly interface. Record digital TV perfectly to MPEG-2 or take a still image snapshot and save it to your hard drive. Pause, rewind and fast forward live TV with Timeshifting functions that put you in control of your viewing experience. Never miss your favourite show again with scheduled recording!

CERTIFIED FOR Windows Vista™

Designed for Microsoft® Windows®XP

DVB Digital Video Broadcasting

LV32T

Features

- Watch two DVB-T TV programs on PC at the same time!
- PIP functions:
  - watch two different channels simultaneously
  - watch one channel while recording another
  - TV windows are movable, resizable and swappable
- Rewind and fast forward live TV shows with Always TimeShifting recording
- Electronic Program Guide (EPG) and Supporting HDTV Receiving also
- Listen to DVB-T Digital Radio
- Auto channel scan and automatic channel name recognition
- Create favourite stations for convenient listening
- Personal Digital PCR (Personal Video Recorder)
- Schedule TV recording and save directly to your PC's Hard Drive
- Fully resizable TV (up to full screen)
- Support single and multiple still image capture

System Requirements

- Microsoft Windows® XP / 2000 / VISTA™
- P4 2.0 GHz CPU or above
- 512MB RAM or above
- VGA card at least 32 MB Memory
- Microsoft Direct X9.0 or above
- Microsoft media Player 9.0 or above
- UHF/VHF Antenna for DVB-T Terrestrial TV
- PCI slot

Package Contents

- NOT ONLY TV DUAL DVB-T PCI
- Infrared remote cable
- Remote control
- Software CD
- Quick Installation Guide
- Low profile bracket

Specification

- Input Signal: 75 Ohm
- VHF , UHF
- Receiving Frequency :
  48.25 ~ 863.25 MHz Tuning Range

- Bus: PCI 2.2 Compliant
- Host Bus Burst Rate: 132MB/s
- Host Bus Width: 32 bit

- Fully DVB-T Compliant
  2K or 8K FFT Size.
- Punctured Codes :
  1/2, 2/3, 3/4,4/5, 5/6, 7/8
- Bandwidth :
  6/7/8 MHz Auto Select

- Max No. Section filtering : 32PIDS
- Engine: Software
- Streams Capture: PES and TS

- Video Format:
  MPEG-II Main Profile& Main Level
- Audio Format:
  MPEG-II Audio Layer I & II

- DVB-T IEC connector input x1
- IR cable input

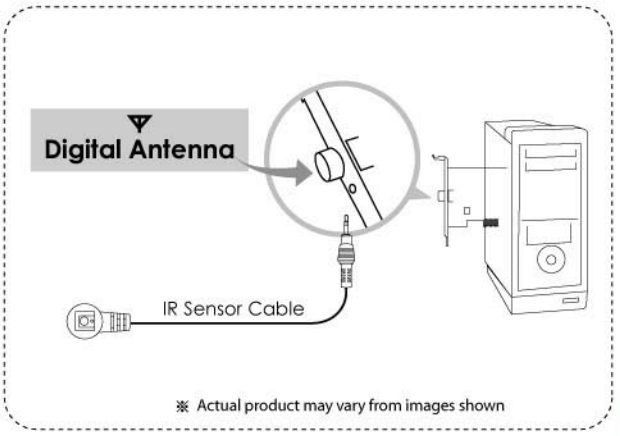

※ Actual product may vary from images shown

www.notonlytv.net